



FEATURES

- Integral Driver, Bypasses ballast
- Universal input voltage 120-277VAC
- Double ended input
 - Reduces installation costs
 - Shunted or Non-shunted
- High Efficiency operation
- Long Life: 50,000 hours L70
- Glass construction for optimum optical efficiency
- Full light output down to -4°F
- RoHS Compliant - Mercury Free
- No UV Emissions
- 5 Year limited lamp warranty
- UL Classified 1598C for US and Canada
- NSF Listed
- DesignLights Consortium® qualified on select models. Consult www.designlights.org/QPL for details

ORDERING GUIDE


Standard										
Model Number	Ordering Code	Length	Lumens	Power (W)	Efficacy (lm/W)	CCT	Beam Angle	Pkg Qty	DLC®	UPC Code
T5HOLACD4F25/840A	T5HOLACD4F25/840A25C	45"	3500	25	129	4000	220°	25	Y	768386680727
T5HOLACD4F25/850A	T5HOLACD4F25/850A25C	45"	3500	25	129	5000			Y	768386680734

ADDITIONAL SPECIFICATIONS

Lamp Type:	Linear T5
Base:	Miniature Bi-Pin (G5)
Color Rendering Index (CRI):	82
Rated Life:	L70 @ 50,000 hours

Ambient Temperature:	-4°F to 113°F
Beam Angle:	220°
EMI/RFI:	FCC Part 18 - Non-Consumer
Warranty:	5 years

WIRING DIAGRAM

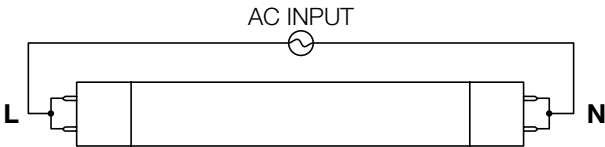


OPERATING NOTES:


- * Input voltage is wired so that one lamp holder is connected to Neutral and the other to Line.
- * Shunted or Non-Shunted lamp holders may be used.



DIMENSIONS: in (mm)

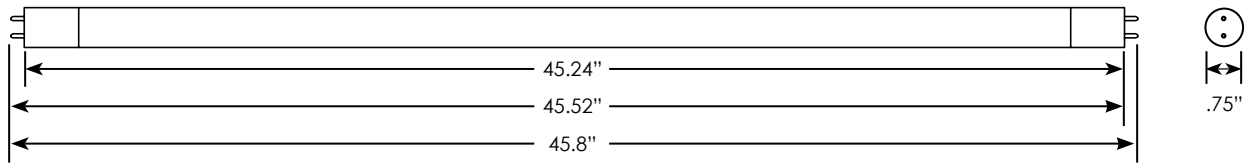

POLAR DISTRIBUTION

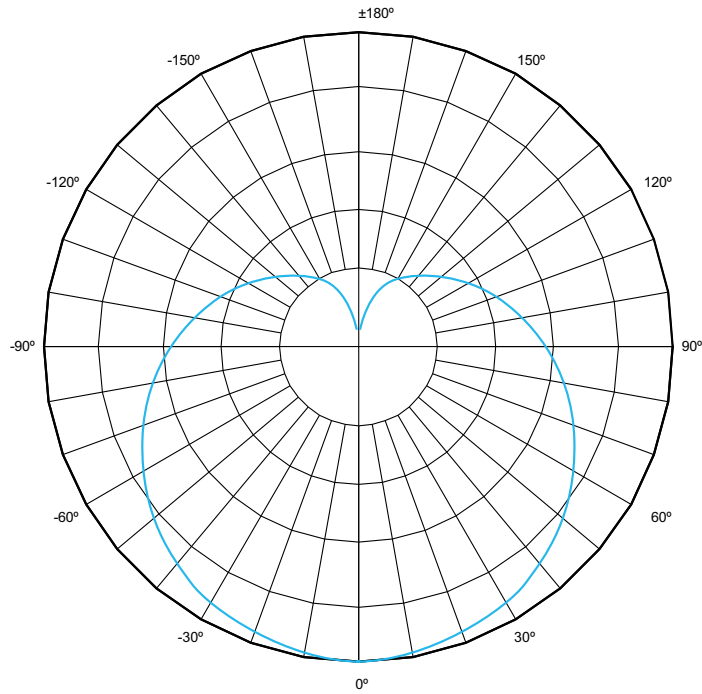

OPERATING NOTES:

- Suitable for use in dry and damp environments
- Must follow installation guidelines provide with the lamp shipment.
- NSF Listed for Food Zone (Non-contact), Splash Zone, and Non-food Zone.